




Redukcja mufowo-nypłowa

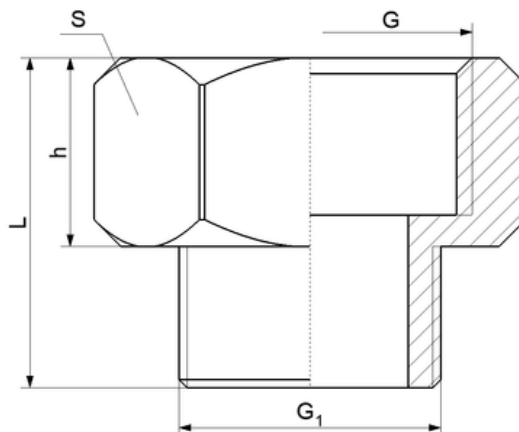

Opis					Opakowanie ilość sztuk		Masa jedn.	EAN	Index
G	G ₁	L	h	S	woreczek	karton	[g]		
1/2"	1/4"	21	12	24	25	500	28	5901797700911	073
1/2"	3/8"	21	12	24	25	500	28	5901797700928	039
3/4"	3/8"	23,5	14	30	25	300	48	5901797702076	414
3/4"	1/2"	23,5	14	30	25	300	46	5901797700935	040
1"	1/2"	25,5	15	37	10	250	72	5901797701987	359
1"	3/4"	26,5	15	37	10	250	68	5901797700942	041
5/4"	1"	36	22	48	10	100	170	5901797702267	438

Charakterystyka

Materiał: CW617N
Max ciśnienie robocze: 16 bar
Max temperatura robocza: +110°C

Atesty



Atest Higieniczny B/BK/60210/0543/21
 Narodowego Instytutu Zdrowia Publicznego